TECUMSEH HERMETIC CONDENSING UNITS

Date: April 1, 1997

MODEL AJB7465AXDXE (Formerly AJ7465BE) R-12 3/4 HP AIR COOLED

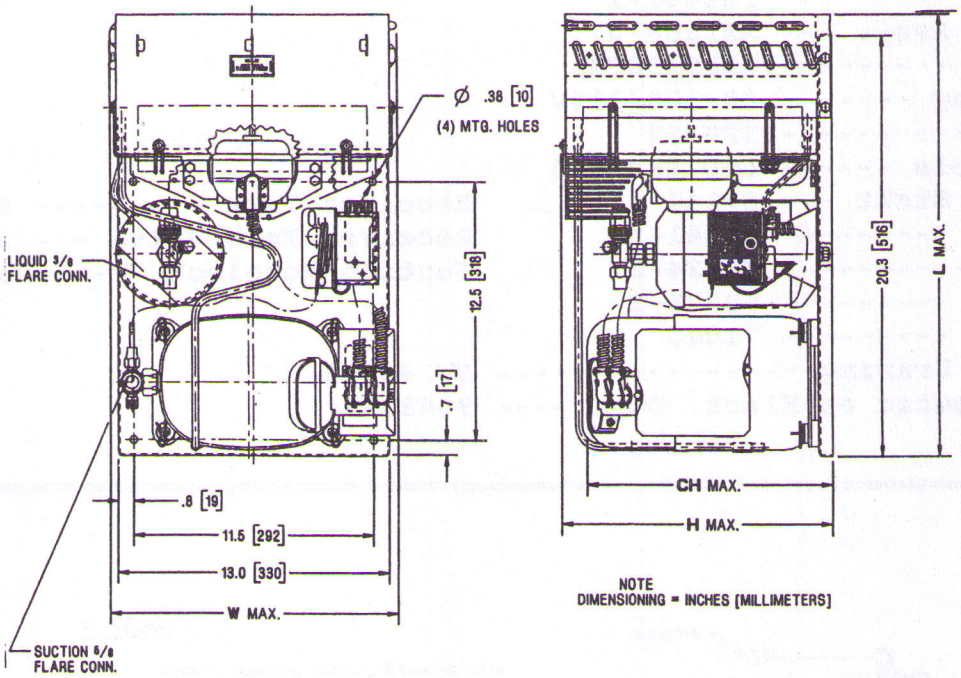

Model	Dimensions				*Line Connection		Pumpdown 90 ° F 90% Full	Air CFM	Oil Chg oz.	Gr. Wt. Lbs.
	L	W	H	CH	Suct.	Liq.				
AJB7465AXDXE	21.5	14.0	12.9	9.0	5/8 F	3/8 F	7.6#	750	22	100

*F=Flare, S=Solder, RF or RS= Rotolock Valve with Flare or Solder Connections
Factory charge: 20 psig nitrogen - MUST BE EVACUATED 60 HZ Performance

Approved Evap. Range		Ambient								
		90° F			100° F			110° F		
°F	PSIG	BTUH	Watts	Head	BTUH	Watts	Head	BTUH	Watts	Head
0	9.2	4260	870	158	4020	890	166	3780	910	174
+10	14.6	5355	1000	168	5110	1020	176	4830	1040	185
15	17.7	5960	1085	173	5690	1110	181	5450	1130	188
20	21.0	6560	1180	178	6300	1210	188	6080	1230	195
25	24.6	7200	1280	186	6880	1315	194	6600	1350	202
30	28.4	7650	1400	194	7510	1435	202	7190	1470	211

Date: 4-1-97

SPECIFICATIONS	AJB7465AXDXE
Nominal Voltage	230/208-60-1
Unit B/M	2B715-9
Voltage Range	253 to 187
Min. Circuit Ampacity	9.5
Max. Fuse Size (Amps)	15
Compressor Model	AJB7465AXD
Bill of Material	AJ201GT-188
RLA/LRA	7.0/46.0
Fan RLA	.70
ESP Overload	P83512
ESP Relay	P82481-1
Int. Rel. Assy.	AE1168-072
Start Cap	85PS330C23
Rating	88-108/330V
Fan Motor	TFM352
Pressure Controls	Low 84026-5
Fan Motor Brckt	57144
Fan Blade	51541-1
Shroud	70724-2
Condenser	50798-2
Fan Guard	71020
Receiver Tank	51081
Receiver Tank Valve	31547 (3/8"F)
Suction Rotolock	31552-1 (5/8"F)
Unit Drawing	SU1893-9
Schematic or Elect. Dwg.	90432-4

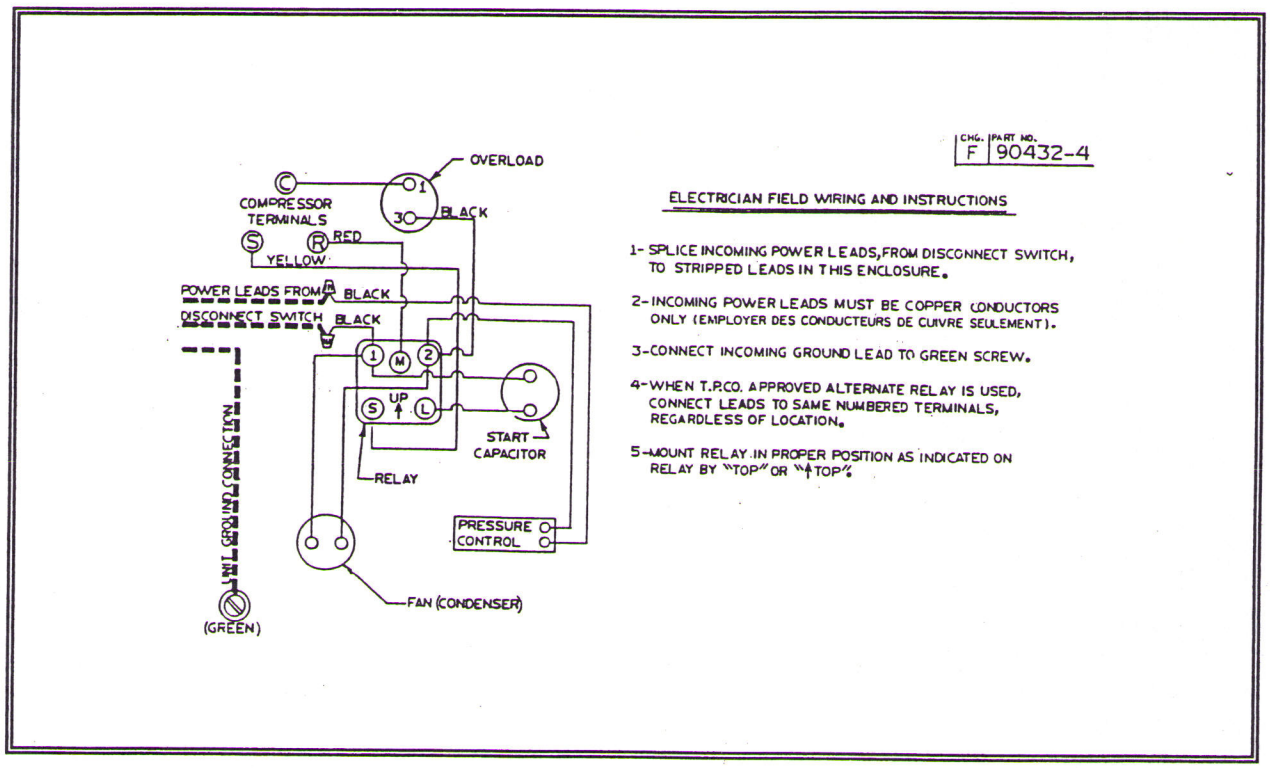

U.L. Listed -----(60 HZ only)----File #SA2372 -------------Card Guide #SGYU
CSA Certified -------------Canadian File #12964C ----------USA File #8873C